



OERLIKON

www.oerlikon-welding.com



FLUXOFIL
THE ORIGIN OF SEAMLESS CORED WIRES

FLUXOFIL the Original since 1968

FLUXOFIL seamless Tubular cored wires meet your highest **weldability and reliability** expectations through precisely selected micro alloying elements and unique production processes.

OERLIKON, more than
50 YEARS* OF EXPERTISE
in Seamless Flux Cored Wire production.



**1968 - patent and production of the first seamless wires*

OERLIKON seamless copper coated wires are widely applied in industry for welding of **Re 355-890 MPa** steels.



- **Resistant against harsh storage** conditions
- **Outstanding wire feeding** combined with **stable arc**
- **Low hydrogen** and reduced risk of cold cracking, delivering highest quality levels
- **Excellent slag removal** and regular bead appearance
- **Superior welding productivity**




The Latest Production Technology

New market requirements call for base materials and welding products delivering highest yield strengths and impacts at low temperatures.

Such demanding applications require **outstanding consistency of mechanical properties** combined with **superior welding performance and productivity**.

- **Best in class deposition rate** combined with exceptional arc stability and operability
- Very good results of **low temperature impact**. Alloying and micro-alloying elements are precisely selected and controlled during wire fill and rolling processes
- Consumable and flux **homogeneity**

Impact test results, Fluxofil MC466M, 20mm plate, V60 joint preparation

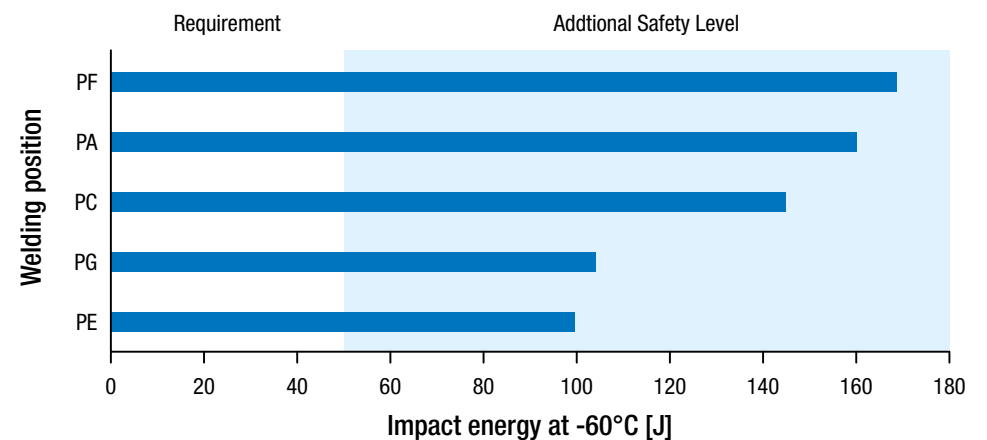

Technical data

Product name		Type	Gas	AWS 5.36	EN ISO 17632-A/18276-A /17634-A
Mild Steels 275MPa<Re<460Mpa					
Fluxofil 14 HD		R	M21/C1	E71T1-C1A0-CS1-H4 E71T1-M21A2-CS1-H4	T 46 3 P M 1 H5 T 46 3 P M 1 H5
Fluxofil 19 HD		R	C1	E71T1-C1A2-CS1-H4	T 46 3 P C 1 H5
Fluxofil M 8		MC	M21	E71T15-M21A2-CS1-H4	T 46 2 M M 1 H5
High Strength Steels 355MPa<Re<460MPa, impact at -40°C and -60°C					
Fluxofil 464M		R	M21	E71T1-M21A4-CS1-H4	T 46 4 P M 1 H5
Fluxofil 20 HD	Impact at -40°C	R	M21	E81T1-M21A4-Ni1-H4	T 46 4 1Ni P M 1 H5
Fluxofil 21 HD	Impact at -40°C	R	C1	E81T1-C1A4-Ni1-H4	T 46 4 1Ni P C 1 H5
Fluxofil M 10	Impact at -40°C	MC	M21	E71T15-M21A4-CS1-H4	T 46 4 M M 1 H5
Fluxofil 31	Impact at -40°C	B	M21/C1	E70T5-M21A4-M21S1-H4 E70T5-M21A4-CS1-H4	T 42 4 B M 2 H5 T 42 4 B C 2 H5
Fluxofil M 10 S	Impact at -60°C	MC	M21	E71T15-M21A8-CS1-H4	T 42 6 M M 1 H5
Fluxofil 40	Impact at -60°C	B	M21	E80T5-M21A4-GH4	T 46 6 1Ni B M 2 H5
Fluxofil MC466M	Impact at -60°C	MC	M21	E71T15-M21A8-CS1-H4	T 46 6 M M 1 H5
Ultra High Strength Steels					
Fluxofil 41	Re 550 MPa	R	M21/C1	E90T5-C1A0-GH4 E90T5-M21A0-GH4	T 55 4 1NiMo B C 2 H5 T 55 4 1NiMo B C 2 H5
Fluxofil M 41	Re 550 MPa	MC	M21	E90T15-M21A5-G-H4	T 55 5 Z M M 1 H5
Fluxofil 29 HD	Re 690 MPa	R	M21	E111T9-M21A2-GH4	T 69 4 Z P M 1 H5
Fluxofil M 42	Re 690 MPa	MC	M21	E110T15-M21A2-G-H4	T 69 4 Mn2NiCrMo M M 1 H5
Fluxofil 42	Re 690 MPa	B	M21	E110T5-M21A4-K4H4	T 69 6 Mn2NiCrMo B M 2 H5
Fluxofil 45	Re 890 MPa	B	M21	E130T5-M21A4-GH4	T 89 4 Z B M 2 H5
Weathering Steels					
Fluxofil 48	Re 460 MPa	B	M21	E80T5-M21A0-GH4	T 46 6 Z B M 2 H5
Fluxofil M 48	Re 460 MPa	MC	M21	E81T15-M21A0-W2-H4	T 46 3 Z M M 1 H5
Fluxofil 18 HD	Re 500 MPa	R	M21	E81T1-M21A0-G-H4	T 50 3 Z P M 1 H5
Cr-Mo Steels					
Fluxofil 25	Mo	R	M21	E81T1-M21PY-A1-H4	T MoL P M 1 H5
Fluxofil 35	Mo	B	C1/M21	E80T5-M21PY-GH4 E70T5-C1PY-GH4	T MoL B C 2 H5 T MoL B M 2 H5
Fluxofil 36	CrMo1	B	C1/M21	E80T5-M21PY-B2H4 E80T5-C1PY-B2H4	T CrMo1 B M 2 H5 T CrMo1 B C 2 H5
Fluxofil 37	CrMo2	B	C1/M21	E80T5-M21PY-GH4 E80T5-C1PY-GH4	T CrMo2 B M 2 H5 T CrMo2 B C 2 H5

R: Rutile - B: Basic - MC: Metal Cored

CUSTOMER ASSISTANCE POLICY

The business of Lincoln Electric is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectriceurope.com for any updated information.